

COMPRESSOR

Displacement (cm ³)	14
Diameter (mm)	31.19
Stroke (mm)	18.54
Net Weight (Kg)	11.5
Oil type	ISO VG 22 ESTER
Oil charge (cm ³)	400

MOTOR

Approximate Power (CV)	3/8
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	198-264
Code	61.540
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	16.5
Main W. resist. at 25°C (Ω)	6.53
Start W. resist. at 25°C (Ω)	31.81

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Fan cooled
Max. ambient temp. (°C)	43

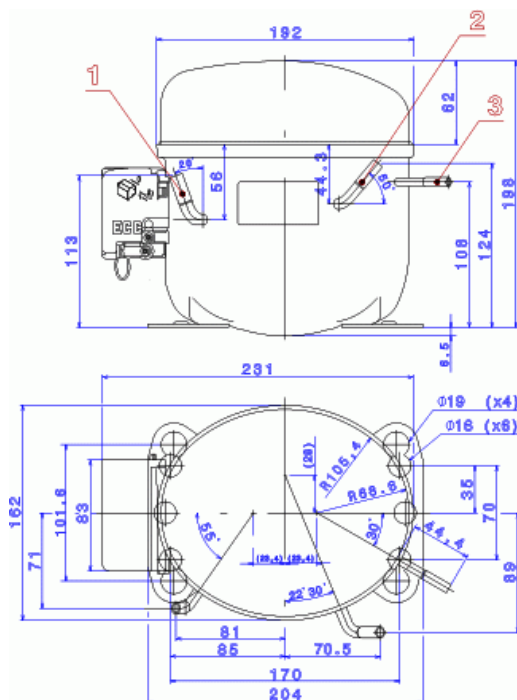
NOMINAL PERFORMANCE	CYCLE A	CYCLE B
Cooling capacity (kcal/h)	196	270
Input power (W)	254	270
EER (kcal/Wh)	0.77	1.00
COP (W/W)	0.90	1.16
Current (A)	1.74	1.79

TEST CONDITIONS

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

ELECTRICAL COMPONENTS


Relay	2014 145.
Pick-Up (A)	7,10
Drop-Out (A)	6,00
Protector	MRT40AMK
Current (A)	9.5
Time check (seg)	7.5-14
Disc temp. (Open/Close) (°C)	105.0 / 61.0

DIMENSIONS AND ELECTRICAL DIAGRAM

DESIGNATION

1	Suction/Service
2	Service/Suction
3	Discharge

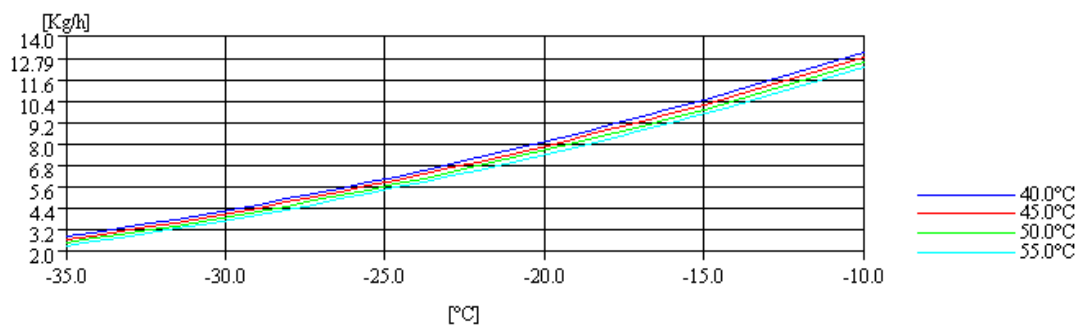
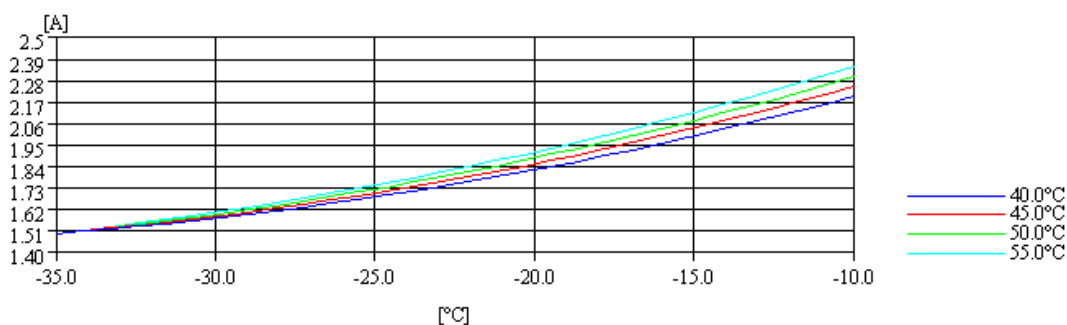
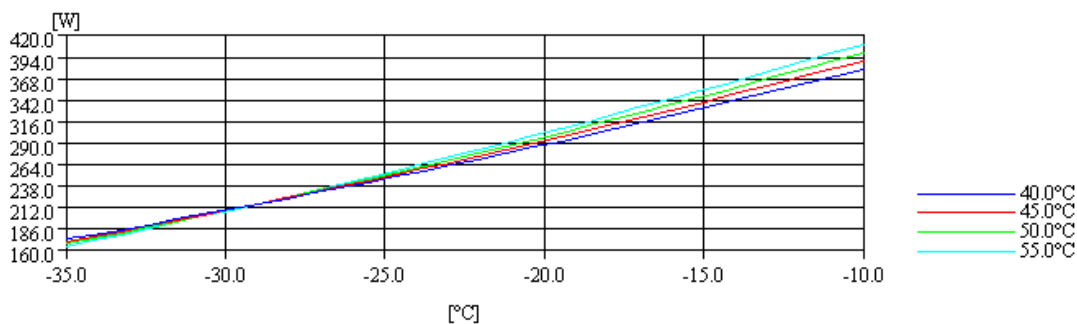
INTERNAL DIAM. (MM)

8.1
8.1
6.5

RSIR


TEST CONDITIONS

Voltage/frequency	220V 50Hz
Ambient t. and return	32 °C
Liq.t. entering expan.	Subcooling at 32 °C

MASS FLOW

INTENSITY

CONSUMPTION

COOLING CAPACITY
